




# VIKING RENTALS

PORTABLE TOILET SPECIALISTS

ABN 96116133914

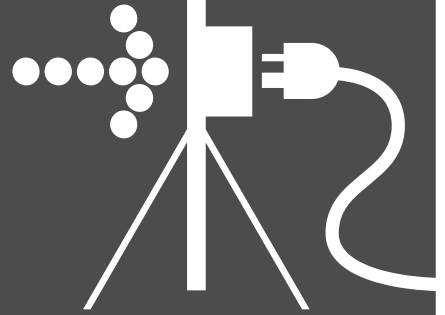

## Temporary Power Poles

### Builders Responsibilities For Temporary Power Pole Installation

It is the Builder's responsibility to select a suitable position for the power pole.

#### When selecting site for power pole, make sure:

- If you are digging the hole – 220mm minimum diameter and 400mm maximum diameter, 1300mm minimum depth and 1500mm maximum depth.
- Our truck has clear access for installation – Power pole can only be placed a maximum of 2 meters from truck as that is the reach the crane has.
- You dial 1100 before we dig, to ensure there are no cables or pipes.
- There is a 3 meter distance from closest obstruction (to allow for the power pole tri-pod legs). All equipment to be within property boundary.
- There is no obstruction for the cable that will be swung from the closest power pole to the temporary power pole (fences, trees on nature strip, etc).
- The cable will not cross over any neighbouring properties.
- The maximum distance from street supply to temporary power pole is 20 metres.

#### Once installed then Energex needs to do the hook-up. Make sure:

- You don't remove the tri-pod legs.
- Energex can gain access (No vehicles are parked in the way). If you are on a busy street please contact Viking Rentals to organise the time schedule from Energex. It can take up to 10 days for Energex to do the hook-up.

### Viking Rentals Temporary Power Poles

admin@vikingrentals.com.au  
vikingrentals.com.au



VIKING RENTALS  
PORTABLE TOILET SPECIALISTS

1300 864 538